

BUTIR

Heater Unit / Riscaldatore



Position in the cabin
Posizione in cabina

Possibility of using several diameter couplings for various diameter of duct.

Diameter 40-45-50-55-60 mm.

These heating unit are versatile and are the ideal solution for heating the interiors of special vehicles.


These products can be installed under the dashboard or under the seat, for example.


Possibilità di utilizzare giunti diversi a seconda del diametro del condotto.

Diametro 40-45-50-55-60 mm.

Queste unità di riscaldamento sono versatili e sono la soluzione ideale per il riscaldamento degli interni di veicoli speciali.

Questi prodotti possono essere installati sotto il cruscotto o sotto il sedile, ad esempio.

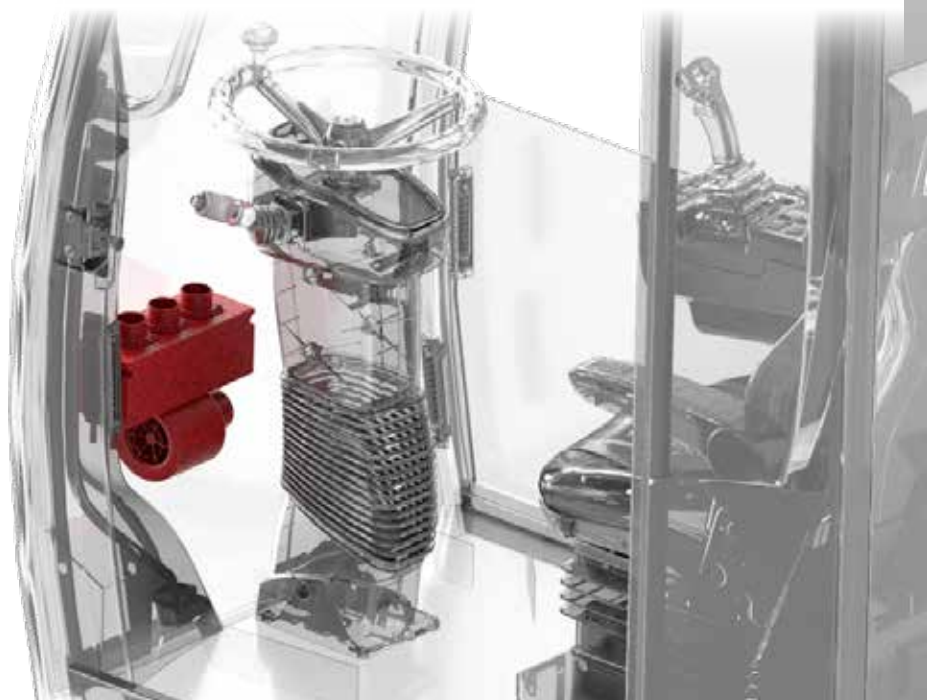

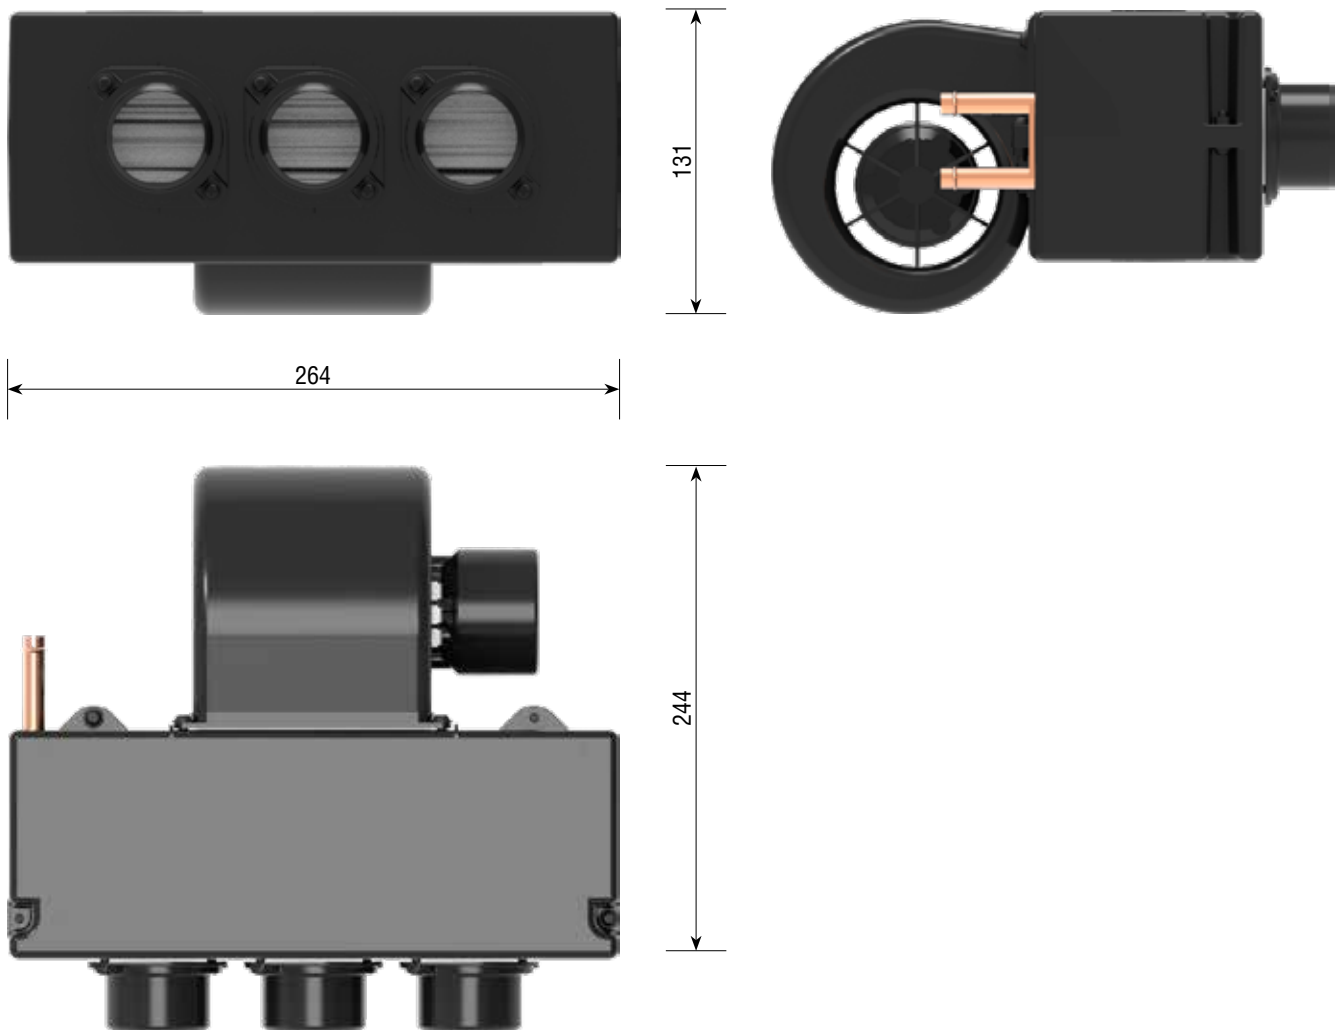

BUTIR Heater Unit / Riscaldatore

HV Heating / Caldo

Part. Codice	Voltage Voltaggio	Ampere Amperaggio	Heater Riscaldamento	Air m ³ /h Aria m ³ /h	Weight Peso	Case Rivestimento	Water connector Connettore acqua	Air connector Connettore aria
A0CC62ES	12 V	4 A	3.8 kW	170	1.4 kg	Plastic injection	10 mm Ø	45 mm Ø
A0CC63ES	24 V	2.5 A	3.8 kW	170	1.4 kg	Plastic injection	10 mm Ø	45 mm Ø
A0CC64ES	12 V	4 A	3.8 kW	170	1.4 kg	Plastic injection	16 mm Ø	45 mm Ø
A0CC65ES	24 V	2.5 A	3.8 kW	170	1.4 kg	Plastic injection	16 mm Ø	45 mm Ø
A0CC62ES/1	12 V	4 A	3.8 kW	170	1.4 kg	Plastic injection	10 mm Ø	45 mm Ø
A0CC63ES/1	24 V	2.5 A	3.8 kW	170	1.4 kg	Plastic injection	10 mm Ø	45 mm Ø
A0CC64ES/1	12 V	4 A	3.8 kW	170	1.4 kg	Plastic injection	16 mm Ø	45 mm Ø
A0CC65ES/1	24 V	2.5 A	3.8 kW	170	1.4 kg	Plastic injection	16 mm Ø	45 mm Ø